



heat tracing cables
SERGE BARIL
since 1985



**FPS-BA Series — Self Regulating Heating Cables
For
Pipe Line, Storage Tank, Freeze Protection & Temperature Maintenance**


DESCRIPTION

Serge Baril FPS-BT Self-Regulating Heater Cable. To be used in Non-Hazardous Locations.
Can be cut to length in the field.

For Industrial, Commercial and New Construction.

PRODUCT CONSTRUCTION

1. Copper bus wire
2. Self-regulating conductive core
3. Bonded inner jacket
4. Outer Modified Polyolefin jacket
5. Tinned-copper braid
6. Modified Polyolefin Outer Jacket (-BA)

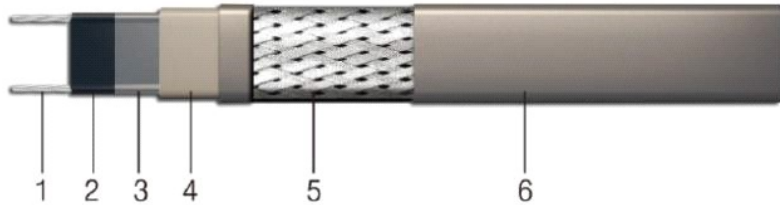

PRODUCT CHARACTERISTICS AND DESIGN INFORMATION

Voltages: 120, 208, 240 VAC
Nema 4X
Available Wattages: 3, 5, 8 & 10 @ 50°F (10°C) per Foot.


Copper bus wire 14 AWG

Max. maintenance temperature
150°F (65°C)


Max. intermittent exposure temperature
185°F (85°C)

Typical Applications:

- Plastic and Metal Pipes
- Lube Oil
- Storage Tanks – Metal & PVC

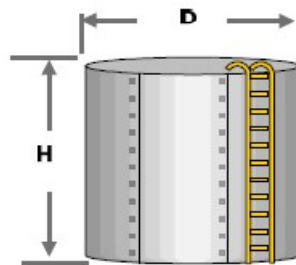

Typical Self-Regulating Installation

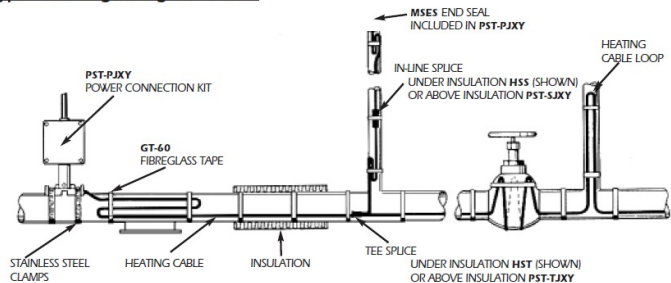

Phone:
905-821-9600
800-268-3900
Email:
Sales@Mentec.on.ca