




**PAC-6/10 CORD S — Roof, Gutters, & Drain De-Icing
 Pre-Assembled Self Regulating Heating Cables**

DESCRIPTION

SBA heat tracing cable type PAC is for De-icing of Roofs, Gutters and Drains. For Industrial, Commercial, Residential and New Construction

PRODUCT CONSTRUCTION

1. Copper bus wire
2. Self-regulating conductive core
3. Bonded inner jacket
4. Outer modified polyolefin jacket
5. Tinned-copper braid
6. Modified polyolefin protective overjacket (-BA)

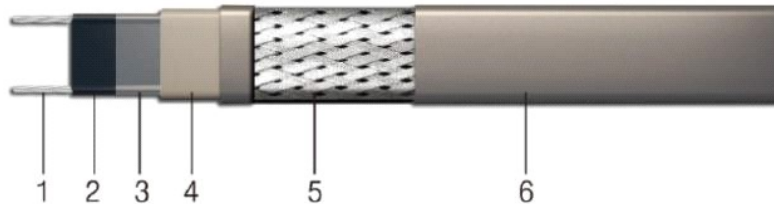

Model	Voltage	Length	Power Output On Pipe @40degF	Power Output On Pipe 50F (10C)	Power Output In Ice & Snow @32F (0C)	Max Exposure Temperature
PAC – 6/10 - 6	110-120V	6 ft.	36 Watts	30 Watts	60 Watts	185°F (85°C)
PAC – 6/10 - 12	110-120V	12 ft.	72 Watts	60 Watts	120 Watts	185°F (85°C)
PAC – 6/10 - 18	110-120V	18 ft.	108 Watts	90 Watts	180 Watts	185°F (85°C)
PAC – 6/10 - 24	110-120V	24 ft.	144 Watts	120 Watts	240 Watts	185°F (85°C)
PAC – 6/10 - 50	110-120V	50 ft.	300 Watts	250 Watts	500 Watts	185°F (85°C)
PAC – 6/10 - 75	110-120V	75 ft.	450 Watts	375 Watts	750 Watts	185°F (85°C)
PAC – 6/10 - 100	110-120V	100 ft.	600 Watts	500 Watts	1000 Watts	185°F (85°C)



PH: 905-821-9600
 800-268-3900
 Web: www.Mentec.on.ca