



heat tracing cables
SERGE BARIL
since 1985



**FPS-BT Series — Self Regulating Heating Cables
For
Pipe Line, Storage Tank, Freeze Protection & Temperature Maintenance**


DESCRIPTION

Serge Baril FPS-BT Self-Regulating Heater Cable. To be used in Hazardous Locations.
Can be cut to length in the field.

For Industrial, Commercial and New Construction.

PRODUCT CONSTRUCTION

1. Copper bus wire
2. Self-regulating conductive core
3. Bonded inner jacket
4. Outer modified polyolefin jacket
5. Tinned-copper braid
6. Modified Fluoropolymer Outer Jacket (-BT)

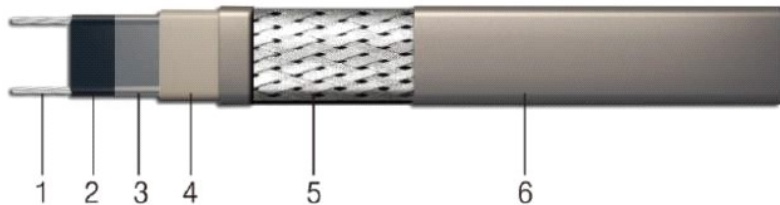

PRODUCT CHARACTERISTICS AND DESIGN INFORMATION

Voltages: 120, 208, 240 VAC
Available Wattages: 3, 5, 8 & 10 @ 50°F (10°C) per Foot.


Copper bus wire 14 AWG

Max. maintenance temperature
150°F (65°C)


Max. intermittent exposure temperature
185°F (85°C)

Typical Applications:

- Plastic and Metal Pipes
- Fire Protection
- Lube Oil
- Storage Tanks – Metal & PVC

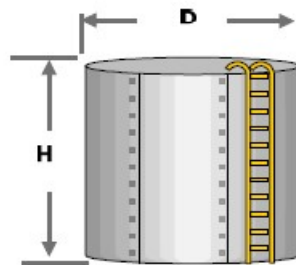

Typical Self-Regulating Installation

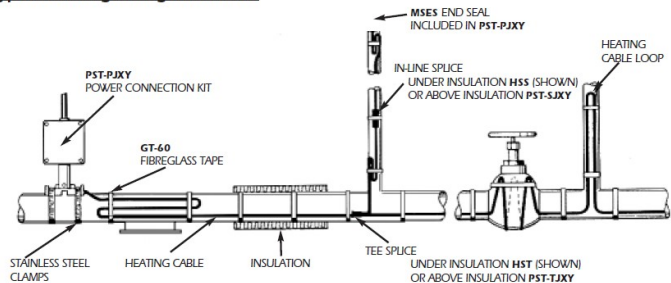

Phone:
905-821-9600
800-268-3900
Email:
Sales@Mentec.on.ca